




NTN Driveshaft CORP.

INA RASE20-N bearing units

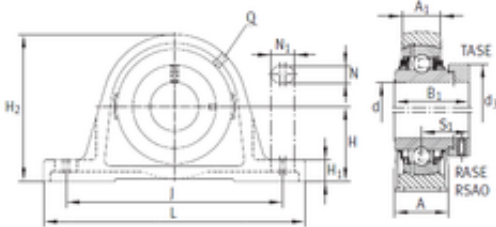

RASE20-N Bearing 2D drawings and 3D CAD models

Bearing No. RASE20-N

| | |
|-------------------------------|-----------------------|
| Bore Diameter | 20 mm |
| d | 20 mm |
| S1 | 26,6 mm |
| Thread (Q) | Rp1/8 |
| d3 | 33 mm |
| A | 32 mm |
| A1 | 19 mm |
| B1 | 43,7 mm |
| H | 33,3 mm |
| H1 | 14,5 mm |
| H2 | 64 mm |
| J | 97 mm |
| L | 130 mm |
| N | 11 mm |
| N1 | 19 mm |
| Weight | 0,63 Kg |
| Basic dynamic load rating (C) | 12,8 kN |
| Category | Pillow Block Bearings |
| Inventory | 0.0 |
| Manufacturer Name | SCHAEFFLER GROUP |
| Minimum Buy Quantity | N/A |
| Weight / Kilogram | 0.742 |
| Product Group | M06110 |
| Number of Mounting Holes | 2 |
| Mounting Method | Eccentric Collar |
| Housing Style | 2 Bolt Pillow Block |



NTN Driveshaft CORP.

| | |
|-------------------------------|--|
| Rolling Element | Ball Bearing |
| Housing Material | Cast Iron |
| Expansion / Non-expansion | Non-expansion |
| Relubricatable | Yes |
| Insert Part Number | GE20KRRB |
| Seals | Double Land Riding Rubber Contact |
| Housing Configuration | 1 Piece Solid |
| Inch - Metric | Metric |
| Other Features | Single Row Standard Shaft Height With Set Screw |
| Long Description | 2 Bolt Pillow Block; 20MM Bore; 33.3MM Base to Center Height; Eccentric Collar Mount; Ball Bearing; 87MM Minimum Bolt Spacing; 105MM Bolt Spacing Maximum; Relubricatable; Cast Iron; Double Land Riding |
| Category | Pillow Block |
| UNSPSC | 31171511 |
| Harmonized Tariff Code | 8483.20.40.40 |
| Noun | Bearing |
| Keyword String | Pillow Block |
| Manufacturer URL | http://www.ina.com |
| Manufacturer Item Number | RASE20N |
| Weight / LBS | 1.323 |
| Bolt Spacing Minimum | 3.425 Inch 87Millimeter |
| Bore | 0.787 Inch 20 Millimeter |
| Length Thru Bore | 1.72 Inch 43.7 Millimeter |
| Base to Center Height | 1.311 Inch 33.3 Millimeter |
| Actual Bolt Center to Center | 0 Inch 0Millimeter |
| Nominal Bolt Center to Center | 3.8 Inch 97 Millimeter |



NTN Driveshaft CORP.

| | |
|----------------------|----------------------------|
| Bolt Spacing Maximum | 4.134 Inch 105Millimeter |
|----------------------|----------------------------|