




NTN Driveshaft CORP.

160 mm x 320 mm x 62,5 mm NACHI 29432EX thrust roller bearings

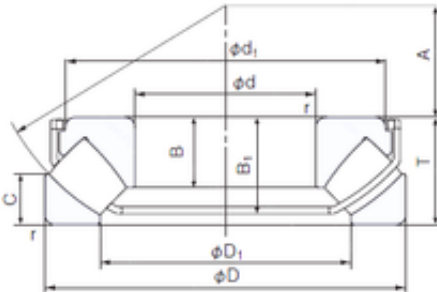

29432EX Bearing 2D drawings and 3D CAD models

Bearing No. 29432EX

Size	160x320x95 mm
Bore Diameter	160 mm
Outer Diameter	320 mm
Width	95 mm
d	160 mm
D	320 mm
T	95 mm
d1	283,8 mm
r min.	5 mm
A	99 mm
B	62,5 mm
B1	85,7 mm
C	45 mm
D1	222 mm
Weight	33,4 Kg
Basic dynamic load rating (C)	1820 kN
Basic static load rating (C0)	5750 kN
(Grease) Lubrication Speed	750 r/min
Bore Type	Cylindrical Bore
Enclosure	Open
Configuration	Single Row
Bore Size	160 mm
Outside Diameter	320 mm
Fillet Radius/Chamfer	5 mm
Width	95 mm



NTN Driveshaft CORP.

Dynamic Load Rating	1,820,000 N
Static Load Rating	5,750,000 N
Limiting Speed - Grease	750 rpm
Limiting Speed - Oil	1,000 rpm
da (min)	230 mm
Da (max)	265 mm
ra (max)	4 mm
db1 (max)	174.5 mm
db2 (max)	181 mm